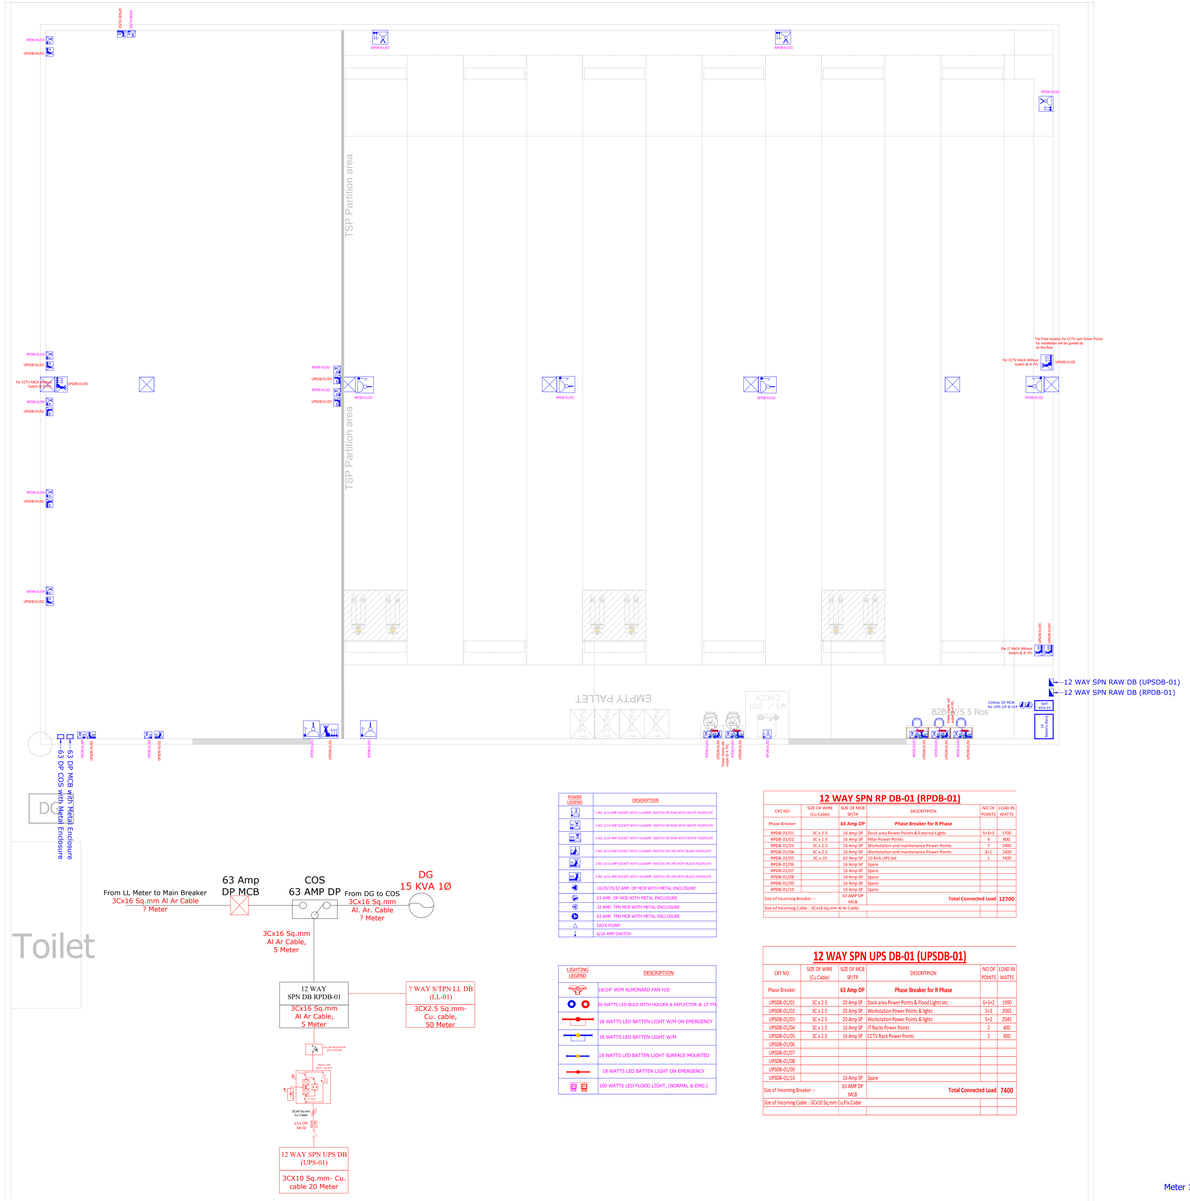

POWER LEGEND	DESCRIPTION
	1 NO. 6/16 AMP SOCKET WITH 1x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	2 NO. 6/16 AMP SOCKET WITH 2x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	3 NO. 6/16 AMP SOCKET WITH 3x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	1 NO. 6/16 AMP SOCKET WITH 1x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	2 NO. 6/16 AMP SOCKET WITH 2x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	3 NO. 6/16 AMP SOCKET WITH 3x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	16/20/25/32 AMP. DP MCB WITH METAL ENCLOSURE
	63 AMP. DP MCB WITH METAL ENCLOSURE
	32 AMP. TPN MCB WITH METAL ENCLOSURE
	63 AMP. TPN MCB WITH METAL ENCLOSURE
	DATA POINT
	6/16 AMP SWITCH

LIGHTING LEGEND	DESCRIPTION
	18/24" W/M ALMONARD FAN H/D
	30 WATTS LED BULD WITH HOLDER & REFLECTOR @ 12' PTH
	18 WATTS LED BATTEN LIGHT W/M ON EMERGENCY
	18 WATTS LED BATTEN LIGHT W/M
	18 WATTS LED BATTEN LIGHT SURFACE MOUNTED
	18 WATTS LED BATTEN LIGHT ON EMERGENCY
	100 WATTS LED FLOOD LIGHT, (NORMAL & EMG.)

12 WAY SPN RP DB-01 (RPDB-01)

CKT NO	SIZE OF WIRE (Cu Cable)	SIZE OF MCB 3P/TP	DESCRIPTION	NO OF POINTS	LOAD IN WATTS
Phase Breaker		63 Amp DP	Phase Breaker for R Phase		
RPDB-01/01	3C x 2.5	16 Amp SP	Dock area Power Points & External Lights	5+3+3	1700
RPDB-01/02	3C x 1.5	16 Amp SP	Pillar Power Points	4	800
RPDB-01/03	3C x 2.5	16 Amp SP	Workstation and maintenance Power Points	7	1400
RPDB-01/04	3C x 2.5	16 Amp SP	Workstation and maintenance Power Points	5+1	1400
RPDB-01/05	3C x 10	63 Amp SP	10 KVA UPS Set	1	7400
RPDB-01/06		16 Amp SP	Spare		
RPDB-01/07		16 Amp SP	Spare		
RPDB-01/08		16 Amp SP	Spare		
RPDB-01/09		16 Amp SP	Spare		
RPDB-01/10		16 Amp SP	Spare		
Size of Incoming Breaker :-		63 AMP DP MCB	Total Connected Load:		12700
Size of Incoming Cable :- 3Cx16 Sq.mm Al Ar Cable					

12 WAY SPN UPS DB-01 (UPSDB-01)

CKT NO	SIZE OF WIRE (Cu Cable)	SIZE OF MCB 3P/TP	DESCRIPTION	NO OF POINTS	LOAD IN WATTS
Phase Breaker		63 Amp DP	Phase Breaker for R Phase		
UPSDB-01/01	3C x 2.5	20 Amp SP	Dock area Power Points & Flood Lights etc	6+3+2	1990
UPSDB-01/02	3C x 2.5	20 Amp SP	Workstation Power Points & lights	5+3	2065
UPSDB-01/03	3C x 2.5	20 Amp SP	Workstation Power Points & lights	5+2	2065
UPSDB-01/04	3C x 1.5	16 Amp SP	IT Racks Power Points	2	400
UPSDB-01/05	3C x 2.5	16 Amp SP	CCTV Rack Power Points	2	900
UPSDB-01/06					
UPSDB-01/07					
UPSDB-01/08					
UPSDB-01/09					
UPSDB-01/10		16 Amp SP	Spare		
Size of Incoming Breaker :-		63 AMP DP MCB	Total Connected Load:		7400
Size of Incoming Cable :- 3Cx10 Sq.mm Cu.Fix Cable					

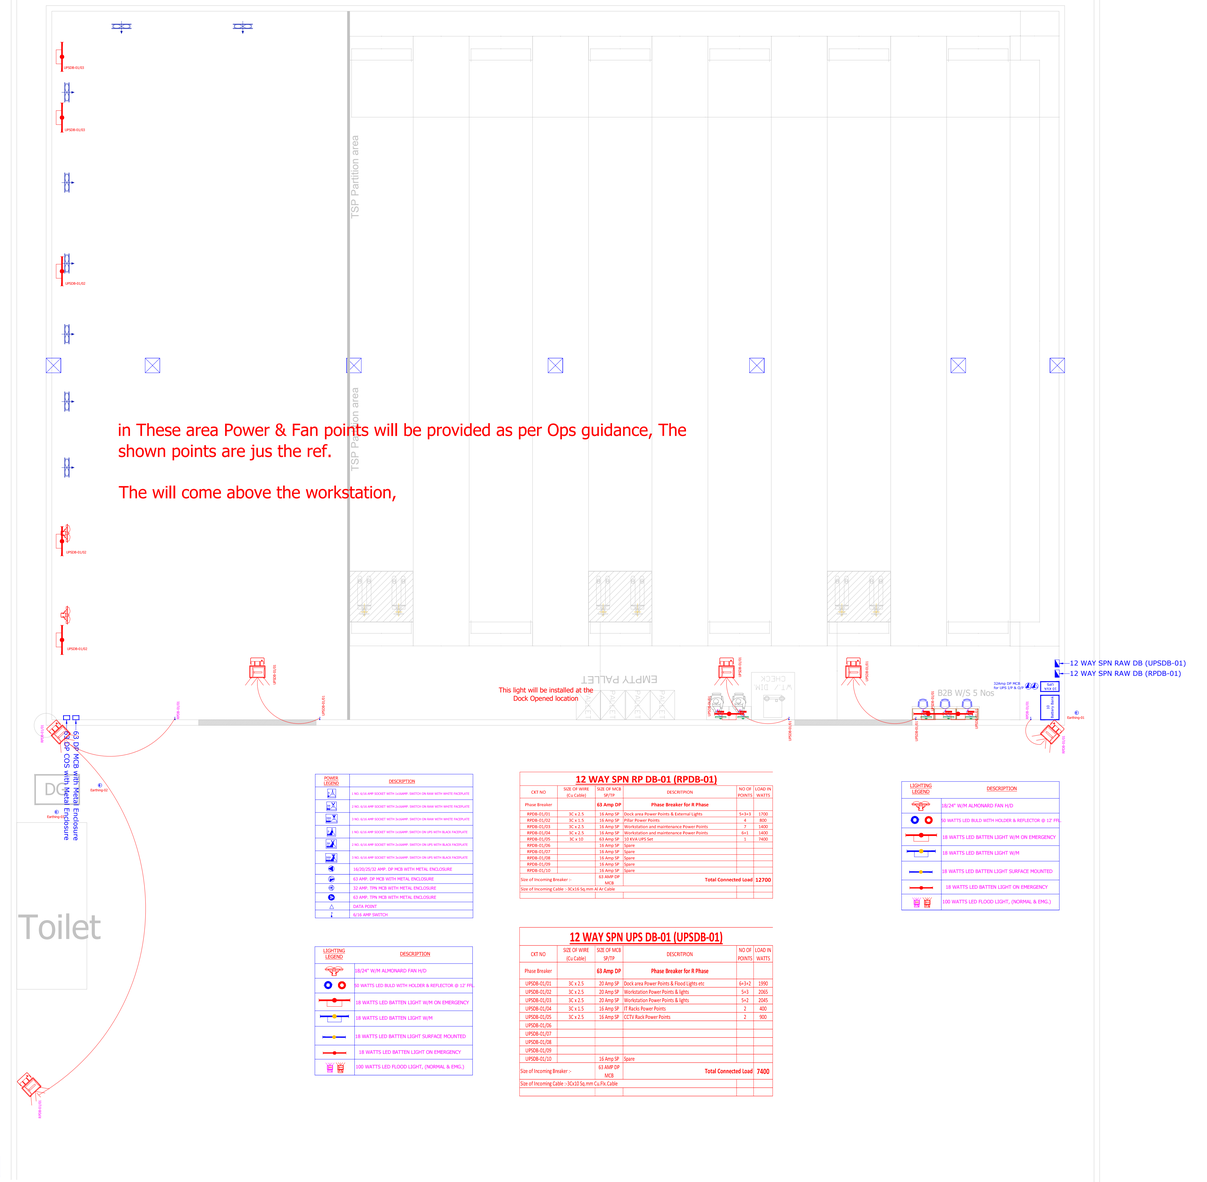

POWER LEGEND	DESCRIPTION
	1 NO. 6/16 AMP SOCKET WITH 1x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	2 NO. 6/16 AMP SOCKET WITH 2x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	3 NO. 6/16 AMP SOCKET WITH 3x16AMP. SWITCH ON BASE WITH WHITE FACEPLATE
	1 NO. 6/16 AMP SOCKET WITH 1x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	2 NO. 6/16 AMP SOCKET WITH 2x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	3 NO. 6/16 AMP SOCKET WITH 3x16AMP. SWITCH ON UPS WITH BLACK FACEPLATE
	16/20/25/32 AMP. DP MCB WITH METAL ENCLOSURE
	63 AMP. DP MCB WITH METAL ENCLOSURE
	32 AMP. TPN MCB WITH METAL ENCLOSURE
	63 AMP. TPN MCB WITH METAL ENCLOSURE
	DATA POINT
	6/16 AMP SWITCH

LIGHTING LEGEND	DESCRIPTION
	18/24" W/M ALMONARD FAN H/D
	30 WATTS LED BULD WITH HOLDER & REFLECTOR @ 12' PTH
	18 WATTS LED BATTEN LIGHT W/M ON EMERGENCY
	18 WATTS LED BATTEN LIGHT W/M
	18 WATTS LED BATTEN LIGHT SURFACE MOUNTED
	18 WATTS LED BATTEN LIGHT ON EMERGENCY
	100 WATTS LED FLOOD LIGHT, (NORMAL & EMG.)

12 WAY SPN RP DB-01 (RPDB-01)

CKT NO	SIZE OF WIRE (Cu Cable)	SIZE OF MCB 3P/TP	DESCRIPTION	NO OF POINTS	LOAD IN WATTS
Phase Breaker		63 Amp DP	Phase Breaker for R Phase		
RPDB-01/01	3C x 2.5	16 Amp SP	Dock area Power Points & External Lights	5+3+3	1700
RPDB-01/02	3C x 1.5	16 Amp SP	Pillar Power Points	4	800
RPDB-01/03	3C x 2.5	16 Amp SP	Workstation and maintenance Power Points	7	1400
RPDB-01/04	3C x 2.5	16 Amp SP	Workstation and maintenance Power Points	5+1	1400
RPDB-01/05	3C x 10	63 Amp SP	10 KVA UPS Set	1	7400
RPDB-01/06		16 Amp SP	Spare		
RPDB-01/07		16 Amp SP	Spare		
RPDB-01/08		16 Amp SP	Spare		
RPDB-01/09		16 Amp SP	Spare		
RPDB-01/10		16 Amp SP	Spare		
Size of Incoming Breaker :-		63 AMP DP MCB	Total Connected Load:		12700
Size of Incoming Cable :- 3Cx16 Sq.mm Al Ar Cable					

12 WAY SPN UPS DB-01 (UPSDB-01)

CKT NO	SIZE OF WIRE (Cu Cable)	SIZE OF MCB 3P/TP	DESCRIPTION	NO OF POINTS	LOAD IN WATTS
Phase Breaker		63 Amp DP	Phase Breaker for R Phase		
UPSDB-01/01	3C x 2.5	20 Amp SP	Dock area Power Points & Flood Lights etc	6+3+2	1990
UPSDB-01/02	3C x 2.5	20 Amp SP	Workstation Power Points & lights	5+3	2065
UPSDB-01/03	3C x 2.5	20 Amp SP	Workstation Power Points & lights	5+2	2065
UPSDB-01/04	3C x 1.5	16 Amp SP	IT Racks Power Points	2	400
UPSDB-01/05	3C x 2.5	16 Amp SP	CCTV Rack Power Points	2	900
UPSDB-01/06					
UPSDB-01/07					
UPSDB-01/08					
UPSDB-01/09					
UPSDB-01/10		16 Amp SP	Spare		
Size of Incoming Breaker :-		63 AMP DP MCB	Total Connected Load:		7400
Size of Incoming Cable :- 3Cx10 Sq.mm Cu.Fix Cable					